

"CIM" Series

GHIACCIO CUBETTO PIENO

FULL ICE CUBE

18 g



Ice-Tek[®]

BY
MINERVA[®]
OMEGA
GROUP



- Costruzione in acciaio inox e materiali idonei al contatto con gli alimenti
- Gas R290 / Gas R 452 A
- **Vasca raccolta ghiaccio integrata (esclusa per CIM 300/452)**
- Condensazione (A) aria o (W) acqua*
- Controlli elettronici
- Voltaggi speciali, su richiesta
- Macchine rispondenti alle normative di igiene e di sicurezza in vigore
- **Condizioni di lavoro standard:**
 - temperatura acqua 15°C
 - temperatura ambiente 20°C
 - pressione acqua MIN 1 bar / MAX 5 bar
- Consigliata installazione sistema dosatore sale anticalcare




- Construction in stainless steel and specific materials approved for contact with food stuff
- Gas R290 / Gas R 452 A
- **Built-in ice collection tank (not included for CIM 300/452)**
- (A) Air or W (Water) condensing*
- Electronic controls
- Special voltages, on request
- Machines comply with hygiene and safety regulations
- **Standard working conditions:**
 - incoming water temperature 15°C
 - environment air temperature 20°C
 - water pressure MIN 1 bar / MAX 5 bar
- Highly recommended the installation of salt dosing unit to prevent scale built-up of limestone

Disponibili altri formati/pesi di cubetto (sotto richiesta). / Other cube formats/weight available (on request).

* Da confermare - To be confirmed

		CIM 30-12/290	CIM 40-15/290	CIM 50-25/290	CIM 60-40/290	CIM 80-40/290	CIM 100-60/290	CIM 160-75/290	CIM 300/452
Gas		R290	R290	R290	R290	R290	R290	R290	R 452 A
Produzione Productivity	kg/24h	30	40	50	60	80	100	160	300
Capacità deposito Storage capacity	kg	12	15	25	40	40	60	75	-
Potenza elettrica Electrical Power	kW	0,45	0,35	0,8	0,35	0,9	1,0	1,7	2,7
Peso netto Net weight	kg	41	50,5	53	68,5	83	81	108	146
Tensione nominale Volt Rated	V/ph/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50 (**)	230/1/50 (**)

(**) Fornite senza pulsante START/STOP (eventuale adeguamento impianto del cliente non incluso)
 Not included START/STOP switch (eventual adaptation on electrical box is not included)

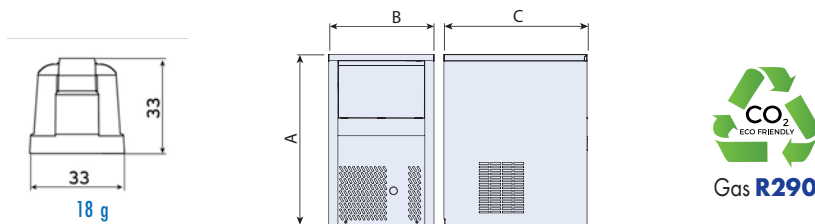

		CIM 30-12/290	CIM 40-15/290	CIM 50-25/290	CIM 60-40/290	CIM 80-40/290	CIM 100-60/290	CIM 160-75/290	CIM 300/452
A	mm	690	685	795	800	900	985	985	860
B	mm	390	500	500	736	736	736	840	1255
C	mm	550	600	600	620	620	620	760	595

ACCESSORI - ACCESSORIES



I dati del presente catalogo non sono impegnativi e potranno subire variazioni senza preavviso. Specifications and other features are subject to change without notice. (03/25)